

Rec'd PCT/PTO 13 MAY 2005

PCT/AU03/01523



#3

REC'D 01 DEC 2003

WIPO PCT

Patent Office
Canberra

I, LEANNE MYNOTT, MANAGER EXAMINATION SUPPORT AND SALES hereby certify that annexed is a true copy of the Provisional specification in connection with Application No. 2002952790 for a patent by MICROTECHNOLOGY CENTRE MANAGEMENT LIMITED as filed on 18 November 2002.

WITNESS my hand this
Twenty-fourth day of November 2003

LEANNE MYNOTT
MANAGER EXAMINATION SUPPORT
AND SALES



Best Available Copy

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

AUSTRALIA
Patents Act 1990

PROVISIONAL SPECIFICATION

200295 filed 18th November 2002

Invention Title : Motion Activated Power Source

Applicant: Microtechnology Centre Management Limited
[A C N 088 163 366]

Inventors: George Jaroslav Cap

The invention is described in the following statement:

Motion Activated Power Source

This invention relates to a magnetic based electric power source as a substitute for batteries and mains power connections, that draw on ambient vibrations or motion.

5

Background to the invention

For some time there has been interest in harvesting energy from vibrations or motion such as walking to provide power as a replacement for batteries. Two sources of electric power have been used previously piezoelectric devices and magnetic devices.

10

USA patents 4412355 and 4471353 disclose a switch that powers a transmitter to switch on a remote light using the current generated by a magnet on a vibrating reed interacting with a coil.

15

USA patent 5818132 generates electric power from the linear movement of a magnet through a coil

USA patent 5838138 uses a sprung magnet on a key of a key board moving in a coil to generate electric power to recharge batteries on a portable computer or similar device.

20

USA patent 5844516 discloses a wireless remote controller, which replaces batteries with a piezo generator actuated by a push button or turning wheel.

USA patent 5945749 discloses a power generator for devices on a train which uses the motion of the train to oscillate a magnetic piston within a coil.

25

USA patent 6220719 provides a torch with a magnet able to reciprocate within the torch barrel which is wound with coils. The arrangement includes a capacitor for storing charge.

USA patent 6291901 discloses an automobile wheel with a magnet and coil arranged so that deflection of the tire causes relative motion between the magnet and the coil to generate electricity.

30

WO 01/20760 discloses a micro piezo generator comprising a micro fabricated silicon cantilever with a piezo layer on the cantilever so that vibration of the cantilever to generate current.

There is a need for a device which can generate electrical power without being actively actuated but which simply relies on the vibration or movement of the body or article to which it is attached.

5 **Brief description of the invention**

To this end the present invention provides an electrical generator which includes

- a) An elongated support fixed at one end but free to move or flex at the other
- b) a coil with electrical outputs secured to said elongated support remote from the fixed end
- 10 c) A magnetic field adjacent the coil such that movement of the coil in the magnetic field, induces an electric current.

An advantage of this invention resides in the fact that it is the coil that moves rather than a magnet. The coil provides the main inertial mass of the generator. Preferably the support is a thin reed and is L shaped so that the coil can be
15 moved in two component directions. In one embodiment the membranes are made of stainless steel.

The magnetic field is provided by a permanent magnet or an array of permanent magnets. Preferably the magnetic flux is non linear and the permanent magnets are configured to maximize the magnetic flux over the path of the moving coil to
20 maximize current generation.

The generator of this invention harvests the mechanical energy of motion and converts it into storable electrical energy. The device has a passive parasitic operation meaning that it converts energy without any active input, i.e. there are no buttons to push nor is there any required intentional shaking or direct
25 activation of any kind. The device is parasitically attached to or placed into a receptacle that is attached to a moving object. For example the device may be placed in a trouser pocket, placed in a handbag or case, attached to an animal, tree, motor vehicle, ship, machine or any moving body.

The supports are preferably 'L' shaped membranes or reeds that can be set to
30 vibrate by movement or vibration, but instead of a fixed membranes it may be a pivoted rod or membrane with the coil at the free end. The advantage of this arrangement lies in the possibility of inclusion of several pivots of different

material type and thickness, which will have different resonant frequencies. This configuration will increase the 'harvesting bandwidth' of the invention. Each rod – pivot branch of the tree combination can be arranged to harvest at a different frequency. The operation of each of the 'branches' is the same as for a single membrane. A coil is fixed to each of the free ends of the branches; each of these coils is made to pass (as with the single membrane) through the field of a permanent magnet arrangement. And two of these trees are needed to support the coils on each branch.

As the coils pass through the field created by permanent magnets arranged around the coils they generate an AC voltage, which appears at the coil output wires. The voltage generated can be used to charge a capacitor or a battery. The invention may be used as a movement energy sensor. By attaching the invention to a moving object it can give an indication of movement intensity. This is because the AC voltage generated by the invention is proportional to how vigorously the object moves.

To make use of the AC voltage as a generator, the voltage needs to be converted to a DC current by a rectification circuit and then stored in a capacitor. In many applications, the voltage generated is not high. Preferably low voltage schottky diodes are used in the rectification circuit.

If a rod - pivot tree combination is utilised the outputs of each of the branches is rectified before connecting to the storage capacitor. In another embodiment the membranes, pivots (or reeds) are replaced with a piezo polymer membrane preferably polyvinylidenedifluoride(PVDF). The advantage of using this material is that any movement flexing the piezo material generates a voltage across the material, which is collected by the electrodes. This voltage is enough to turn on low input impedance transistors [MOSFET's], and they can be used to replace the diodes in the previous embodiment and actively rectify the induced voltage from the coils. This aspect of the invention is partly predicated on the discovery that the voltage generated by the piezo membrane and the voltage generated by the coils is in phase. Although the energy generated by the piezo strip is lower than that generated by the coils, the voltage is much higher and is sufficient to turn on the MOSFET's to rectify the AC voltage generated by the coils. The

advantage over the previous embodiment is that without the piezo membrane the turn on voltage and/or current had to be provided by the coil generators to begin the rectification process. The piezo membranes supply the turn on voltage in this embodiment, as they are flexed in phase by the movement of the coils. This voltage when applied to the gates of the MOSFET transistors almost develops a condition of 'zero switching'. In practice this 'zero switching' actually occurs between 0.1 and 0.2 volts of the actual AC zero point, which translates to a significant increase in the harvesting efficiency when compared to standard diode turn on voltages of 0.6 to 1.2 volts.

Thus this invention in another aspect provides a rectification device for a parasitic energy harvester in which vibration or motion induces relative movement between a coil and a magnet to induce an electric current in the coil in which a piezo electric membrane is incorporated into the support for either the magnet and/or the coil so that the vibration or motion also produces a voltage in the piezoelectric membrane sufficient to power the rectification of the voltage produced by the relative movement between the coil and the magnet. This rectification means can be applied to any device where a magnet oscillates about a coil as in the prior art or where a coil oscillates in a magnetic field as in this invention.

The devices embodying this invention can be small, lightweight, and unobtrusive and yet generate sufficient electric energy to power sensor or alarm circuits and transmitters in applications where battery power is usually needed. This includes most remote sensing where motion or vibration is experienced as in land, air and water vehicles, buoys, animal tracking devices, pagers etc.

Detailed description of the invention

A preferred embodiment of the invention will be described with reference to the drawings in which:

Figure 1 shows a three-dimensional rendering of the mechanical assembly of the invention;

Figure 2 is an exploded assembly of the first embodiment (with schottky diodes, see figure 5 for the electronic schematic) of the invention.

Figure 3 shows the section plane of the shaded plane of fig 1.

5 Figure 4 is a schematic of the PVDF (Piezo) membrane (second) embodiment electronic assembly.

Figure 5 is a schematic of the stainless steel membrane (first) embodiment electronic assembly.

Figure 6 is a schematic circuit diagram of the DC to DC switch mode voltage converter module used in a preferred embodiment of the invention

10 Figure 7 is a schematic circuit diagram of the voltage detector module used in a preferred embodiment of this invention.

Figure 8 is a schematic circuit diagram of the DC to DC converter and the voltage detector modules placed together.

15 Figure 9 is a schematic circuit diagram of the charge indicator circuit. This uses the other of the piezo membranes which is not used in rectification (in fig 4) to power a neon light.

Figure 10 is a high level schematic of all the modules.

Figure 11 is a drawing of the second embodiment PVDF membranes (clear) with the electrodes (in black)

20 Figure 12 is a drawing of the second embodiment coil position, suspension and motion (oscillation).

Figure 13 is a drawing showing the flexing components of the membrane.

Figure 14 is a drawing showing the rod and pivot 'tree' replacing the single membrane, enabling a larger harvesting bandwidth.

25

For the invention to function it must be parasitically attached to or placed into a receptacle that is rigidly attached to a moving object.

Parts 12, 21 & 13 are magnets and are held in place locally by parts 20, 18, 11, and 23.

30 The magnet parts 12 adhere by magnetic attraction to the main body part 11.

The magnets part 13 are fixed inside a hollow section of part 20 which is fitted on a spigot protrusion from the centre of parts 18.

The permanent magnets part 21 are fixed on top of the solid section of part 20. All magnets are placed with their North Pole in the direction of the arrows in fig 3. The placement and alignment of the magnets shown in fig 3 develop a strong non-linear magnetic flux density in the cavity between them.

5 Parts 15 are two stainless (or piezo) membranes that support the two coils (part 14) and the bobbin part 17 in the cavity between the magnets.

Parts 16 are hollow plug fixings that attach the membranes 16, to the bobbin body 17. Spacers 22 and printed circuit boards 19 fix the position and separate the membranes to the main body 11 and the outer body 18. Parts 18, 19, 22 and
10 15 are fixed to part 11 by two 1 inch x 8 BA brass screws.

Parasitic attachment to a moving object will force the device into random movement. The combined mass of the coils (parts 14), bobbin (17) and fixings
~~(16) together with the membranes (15) act as a mass - spring network, which is~~
15 set into oscillation (see fig 12) by the movement of the invention body. As this random movement may be in two of three component directions (see fig 13) signified in cartesian coordinate system by the symbols x, y, and z, the orientation of the mass spring network is very important for energy 'capture'. The membrane (15) has an 'L' shape (see fig 2 & fig 11) which allows energy capture
20 in two directions x' and y' (see fig 13) which ensures alignment with at least one major movement direction for any placement.

A direct result of the oscillation of the coil (14), bobbin (17), fixings (16) and membranes (15) network as described above, is the oscillation of the coil in the
25 cavity region permeated with the non-linear flux density. The interaction of the passage of the coil with the flux density produces an AC voltage in the coil. This voltage to be stored for later use must first be rectified into a DC voltage.

This voltage is rectified by a shottky diode voltage doubler and then connected so that it can charge a capacitor, shown schematically in fig 5. The charge in the
30 capacitor (C3) can be used as a battery replacement.

Figure 4 is the electrical schematic of the next embodiment of the rectification circuit as an 'active' rectification circuit. The basic configuration is adopted from

the voltage doubler circuit in figure 5 and the extracted energy is stored in the output capacitor (C3) as in figure 5. What is different is that the stainless steel membranes (15) are replaced with piezo membranes, and the voltage derived from the flexing of the piezo membranes is used to turn on MOSFET transistors.

- 5 The voltage developed by the piezo membrane may be too large for the capability of the gate of the MOSFET transistor, and preferably it is needed to limit the voltage from the piezo membranes. The zener diodes incorporated in the MOSFET package do this (see fig 4) and this configuration also eliminates all problems with stray capacitance that would be associated with external components. Please note that this embodiment (see fig 4) will revert to the previous embodiment (see fig 5) if for any reason the piezo MOSFET switching circuit fails. Each MOSFET has an internal clamping diode designed to prevent back EMF destroying the device. If the gate of the MOSFET is not turned on, this type of MOSFET will revert to functioning as if it were a diode and the equivalent operating circuit will be as in figure 5. The benefit of this embodiment is that it is more efficient than the first embodiment.

Three extra electronic modules may be added to the device described above:

1. DC to DC switch mode voltage converter Module (see fig 6)

- During start-up operation of the device, energy begins to be stored in the capacitor C3 (see fig 6). Because of the large capacity of this capacitor (0.01Farad) it may take some time (and therefore walking distance) to charge the device to useable voltage levels, even though the actual energy stored in the capacitor may be enough to drive the particular application. A switch mode step-up DC to DC voltage converter is used to convert the voltage to a useable level as required by the application. The supply current will decrease in proportion to the voltage increase, and there are losses in the efficiency (80%) and drive current (30 uA) of the converter.

- Typically the converter will start-up when the voltage in the capacitor C3 rises above 0.8 Volts. Once turned on the device will continue to operate until the voltage in C3 drops below 0.3 Volts.

This means that the device has drive capability as soon as the energy is available in the capacitor C3.

2. Voltage Detector Module (see fig 7)

When batteries are connected to a circuit voltage instantly appears in the circuit and the circuit begins to function as expected. For energy harvesters the voltage appears in the circuit as it is generated. The output of the DC to DC converter
5 when switching to the application voltage still rises in time to the required application voltage. This may cause problems when turning on some integrated circuits. This is because the voltage is not high enough and a 'partial turn on state' is initiated. This may occur where the circuit is output is close to the required voltage threshold but, continues to run the device by draining more and
10 more current. This has the unfortunate result of draining all the charge from the storage capacitor C3 without turning on the application.

This problem is overcome using a voltage detector (see fig 7). The detector is set so that it senses when the output voltage of the DC to DC converter is at the application voltage. It then switches its output (pin 1) to this voltage (see fig 7).
15 This output is used to turn on a MOSFET transistor which then switches on the output connection to the negative supply.

This means that when the device is charged and ready to function it automatically turns itself on to drive the application and vice versa. The voltage detector circuit behaves as an automatic on /off switch. A schematic circuit of both modules
20 together is shown in figure 8.

3. Charge Indicator Module (see fig 9)

When operating the device it is preferable to have a visual indication of the operational status of the device. This is achieved by switching the voltage developed in one of the flexing PVDF (piezo) membranes through a neon bulb
25 indicator. The switching is achieved by driving two MOSFET transistors from the voltage detector module (see fig 9). A little movement of the device will be enough to light up the bulb, and immediately indicate to the user the status of charge in the device.

Modules 1 and 2 increase the capability of the device to be used with almost any
30 device. The third gives a visible indication when the device has enough energy to drive the particular application.

Although the device described was developed for powering remote key vehicle access, it has applications in many other areas including:

Inside the human body

1. Recharging batteries

5 On rotating objects

1. Heavy machinery crankshafts
2. Turbines,
3. Large gears,
4. Mining industry

10 On reciprocating objects

1. Heavy machinery piston rods,
2. pistons,
3. Packing machines
4. Process and plant operations

15

5. Robotics
6. Assembly lines
7. Crane hook and body stress analysis

Wild life and Stock tracking

1. Powering animal active tagging and
2. animal tracking systems

20

On top of liquids

1. Powering buoys,
2. Beacons,
3. emergency beacons,
4. military &
5. environmental sensors

25

Within Liquids such as

1. Molten plastic,
2. Setting concrete
3. Shark net power supplies,
4. Marine applications

30

Structural monitoring such as

1. Within bridges,
2. Large machinery,
3. Generators,
4. Buildings,
5. Ships,
6. Rockets,
7. Aircraft and
8. Roads

35

40

Environmental monitoring such as

1. Air Pollution monitoring in fields (i.e.: Attaching generator to the high branches of trees),
2. Air Pollution monitoring over (or water pollution within) lakes

45 Commercial to the public

1. Packing Magneto in standard battery type packages (e.g.: 'D' cell or 'Lantern')

2. Novelty toys for children or executive toys Shipping Container and Cargo

1. Active tagging and

2. Tracking monitoring

Sport

5

1. Athlete (or player) sensor and location monitoring

2. Competition equipment sensor and location monitoring (e.g.: sculls, javelins etc)

10 From the above those skilled in the art will realise that this invention differs from previous attempts in

- Using moving coils and not moving magnets allowing for better shielding of the magnetic field lines.
- Using a vibrating reed or membrane or pivoting rod array vibrating in two component directions to which a coil is attached.
- Using a unique configuration of magnet geometry to optimise the magnetic flux in the path of the vibrating coils.
- Using a vibrating reed or membrane to drive a switched neon indicator light to show the charge status of the device.
- Having a passive operation meaning that it converts energy without any active input, ie there are no buttons to push nor is there any required shaking or direct activation of any kind. The device is attached to or placed into a receptacle that is attached to a moving object.

25 Those skilled in the art will realise that the present invention may be adapted for use in a range of applications and sizes and can be shaped to fit the requirements of the desired application.

30

CLAIMS


- 5 1. An electrical generator which includes
- a) an elongated support fixed at one end but free to move or flex
 - b) a coil with electric outputs secured to said elongated support remote from the fixed end
 - 10 c) A magnetic field adjacent the coil such that movement of the coil induces an electric current.
- 15 2. An electrical generator as claimed in claim 1 in which a piezo membrane supports the coil so that the movement of the coil stresses the piezo membranes and generates a voltage.
- 20 3. An electrical generator as claimed in claim 1 or 2 in which there are several membranes selected to provide a wider vibrational bandwidth.
- 25 4. An electrical generator as claimed in claim 1 or 2 in which the membrane is L shaped and fixed at the top with the coil mounted on the foot of the L.
- 30 5. An electrical generator as claimed in claim 1 in which the magnetic field is provided by permanent magnets which are configured to maximize the magnetic flux in the path of the moving coil.
6. An electrical generator as defined in claim 1, which incorporates a DC to DC voltage converter and a voltage detector.
7. A rectification device for a parasitic energy harvester in which vibration or motion induces relative movement between a coil and a magnet to induce an electric current in the coil in which a piezo electric membrane is incorporated into the support for either the magnet and/or the coil so that

the vibration or motion also produces a voltage in the piezoelectric membrane sufficient to power the rectification of the voltage produced by the relative movement between the coil and the magnet.

ABSTRACT

An electrical generator includes

- 5 a) A pair of elongated L shaped supports fixed at one end but free to move or flex in two component directions
 - b) a coil with electric outputs secured to the elongated supports remote from the fixed end
 - c) an array of permanent magnets arranged adjacent the coil such that movement of the coil through the magnetic field induces an electric current.
- 10 To rectify the current and provide more efficient voltage generation the coil support membrane is replaced with a piezoelectric plastic polymer so that the movement of the coil stresses the piezoelectric support membrane and generates a voltage, which is used to turn on a MOSFET transistor rectifier.
- 15 The device may also include a DC to DC voltage converter, a voltage detector and a charge indicator.

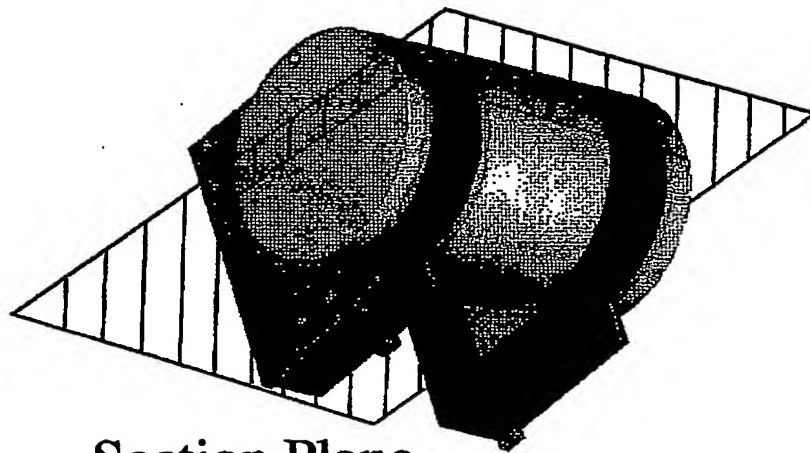

Section Plane

Figure 1

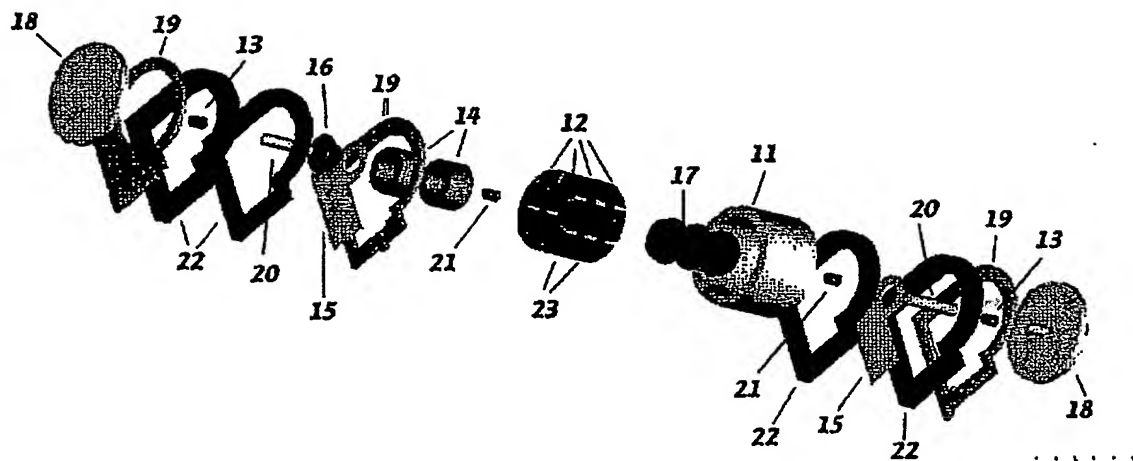


Figure 2

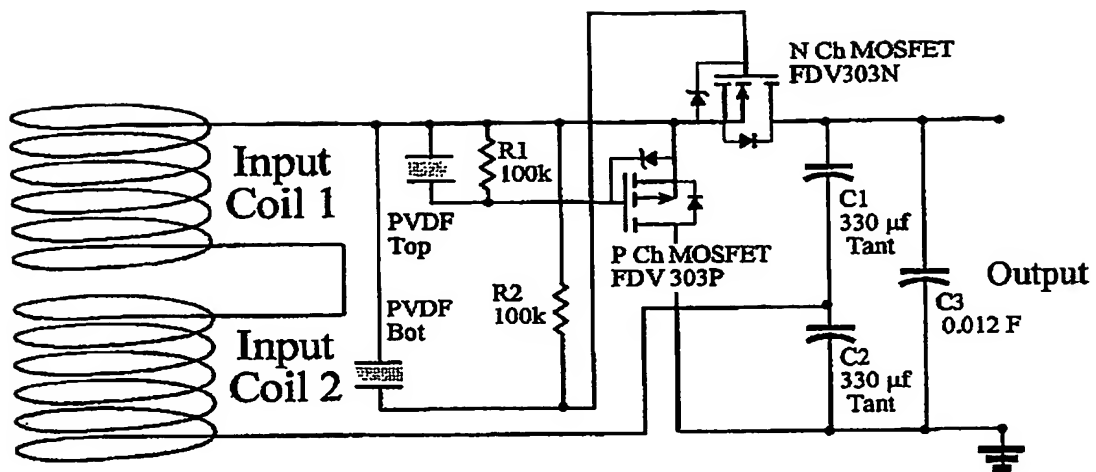


Figure 4

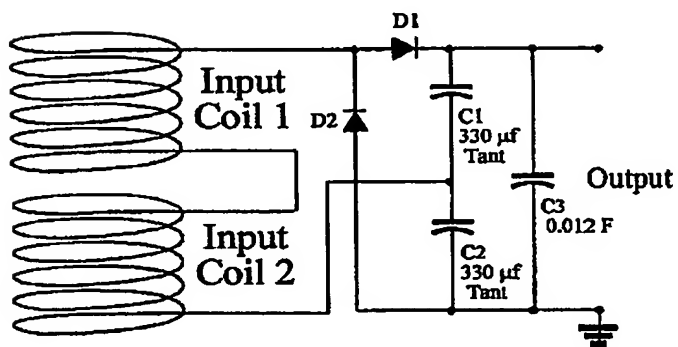


Figure 5

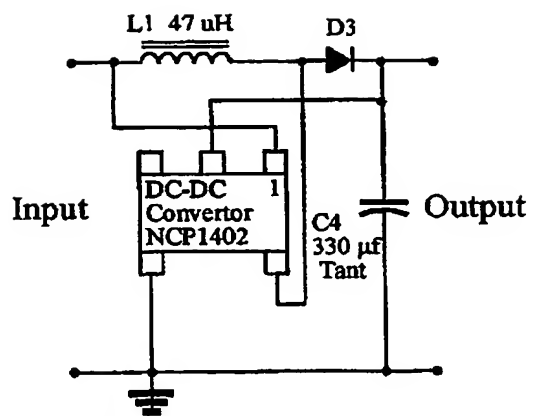


Figure 6

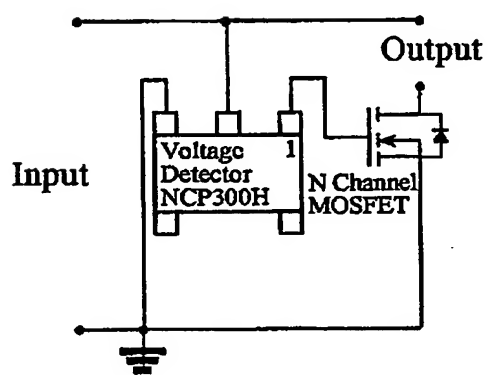


Figure 7

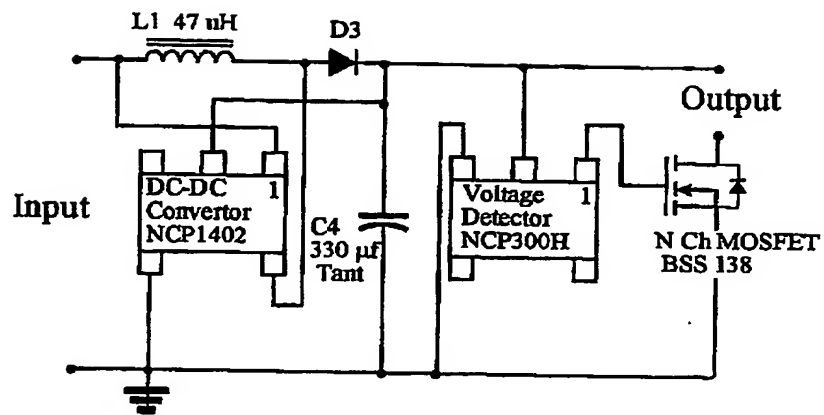


Figure 8

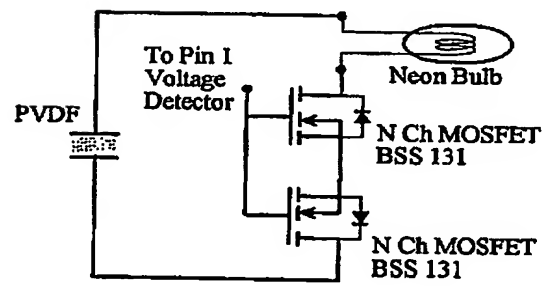


Figure 9

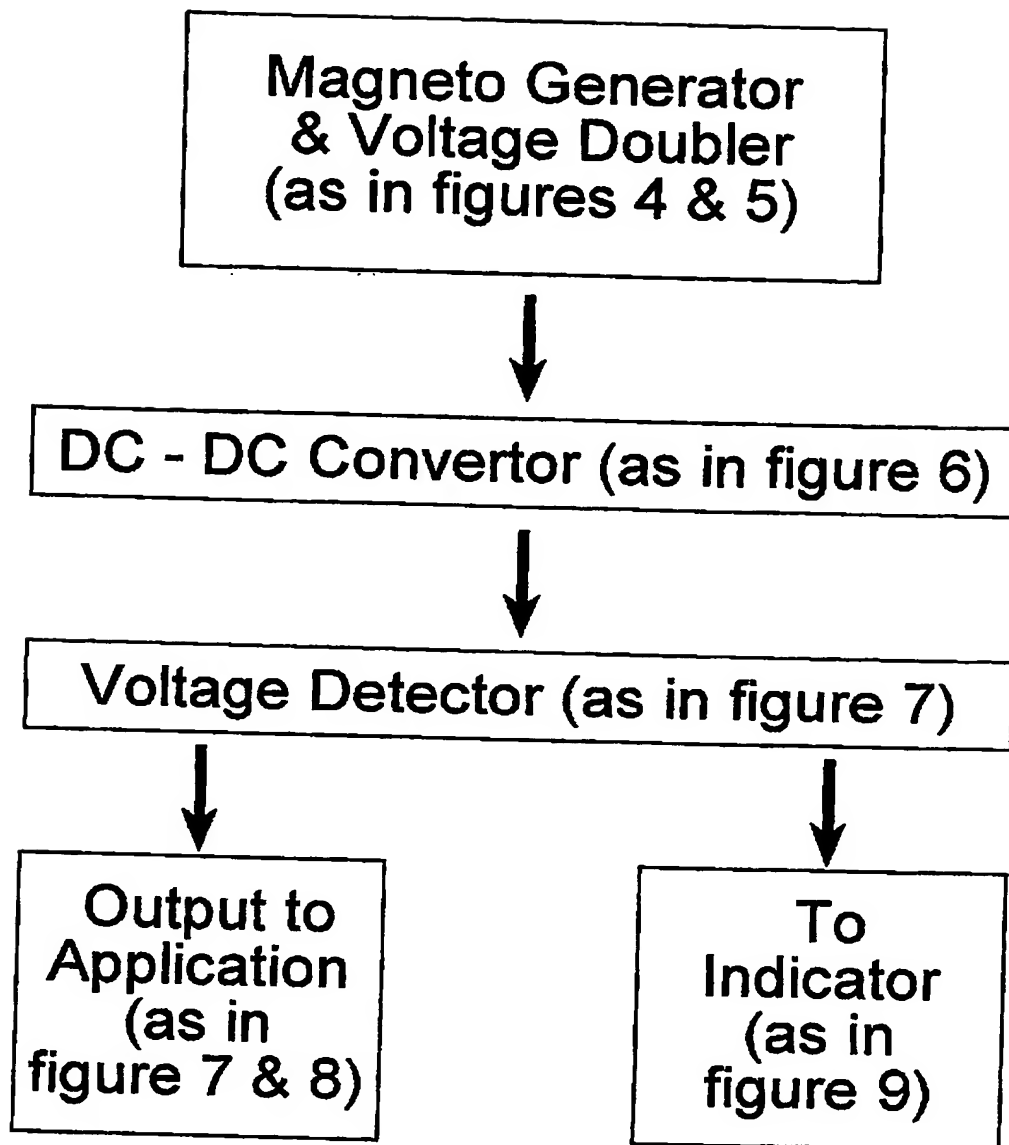


Figure 10

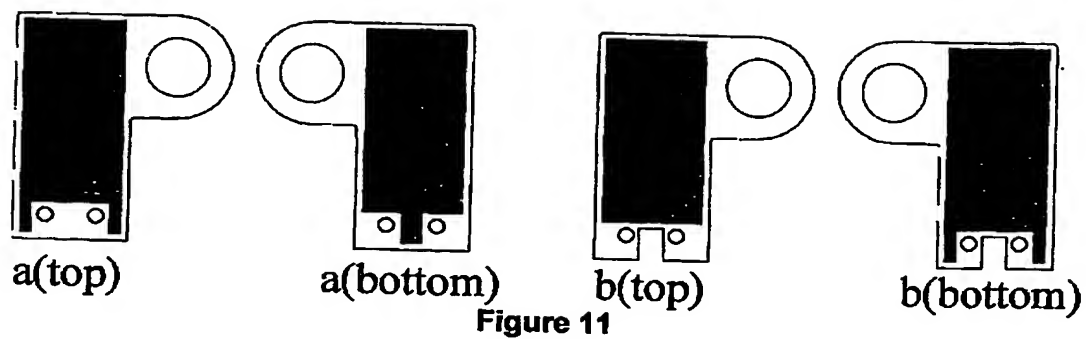


Figure 11



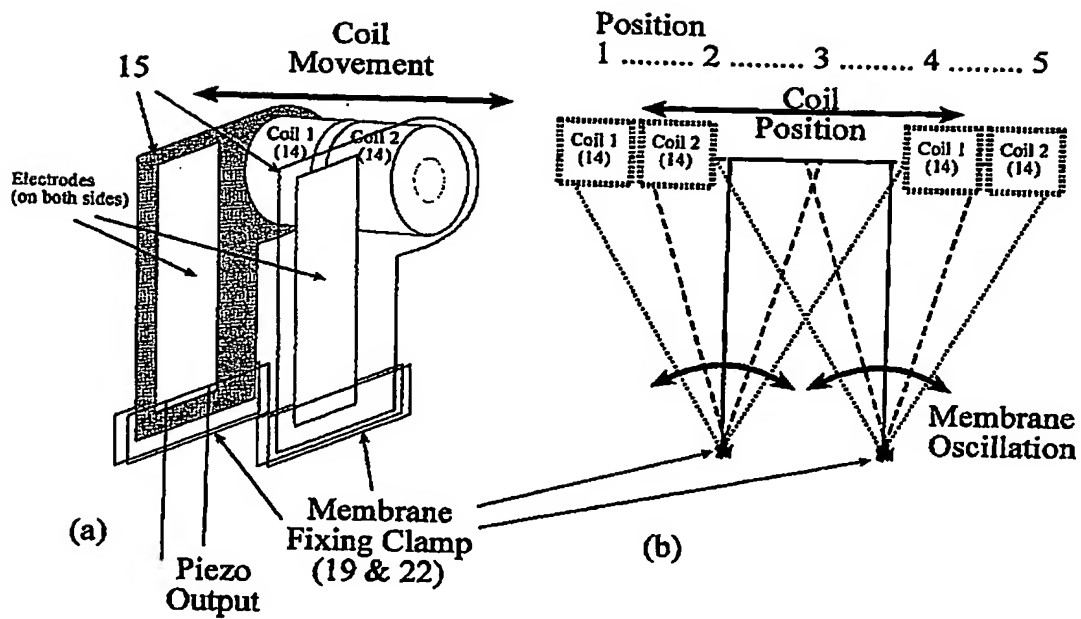


Figure 12



(a) Membrane

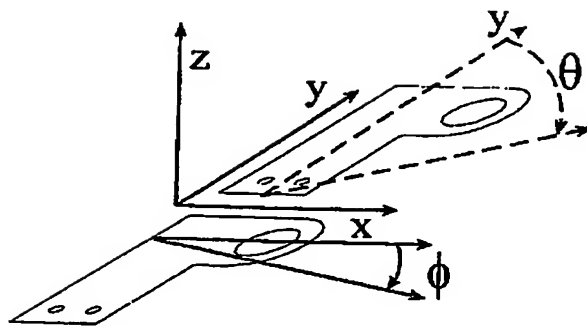

(b) Membrane Flexing Components

Figure 13

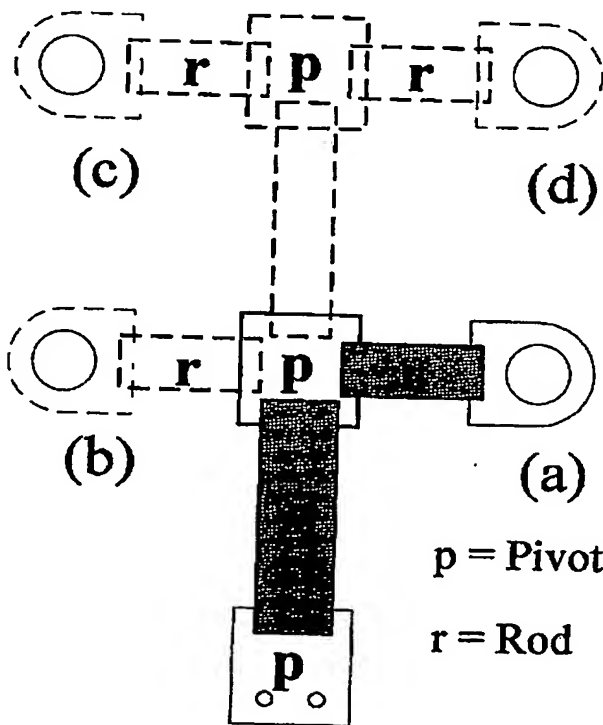


Figure 14

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.